

# ORDER FORM

A4 (210x297)  
 LMT [(0,0) (196,286)]  
 .DWG  
 FILE = 4405  
 REV. 02 DTD 23/08/21  
 MR si riserva a termini di legge la proprietà del presente disegno con divieto di riproduzione o comunicarlo a terzi senza sua autorizzazione.

**Size (Diameter):**

25 mm

50 mm

80 mm

**Model:**

EB24  
(Threaded 1" G)

EB50  
(Round flange  
4 holes)

EB79  
(Round flange  
4 holes)

EB25  
(Round flange  
4 holes)

EB80  
(Round flange  
8 holes)

BQ80  
(Square flange  
4 holes)

**Wiring Diagram:**

A   
STANDARD

L

G

S4  
(Only for 2"/3")

SPECIAL

**Oil Flow Rate:**

65 Cm/s

100 Cm/s   
STANDARD

150 Cm/s

200 Cm/s

**Operating conditions:**

Normal Ambient  
(-40°C)   
Screws: Inox A2  
Window: PMMA  
Finish: Painted 80µm  
Gasket: HNBR

Very Low Temp.  
(-60°C)   
Screws: Inox A2  
Window: Temp.Glass  
Finish: Painted 80µm  
Gasket: Blue Fluorosil.

Very Corrosive  
(-40°C)   
Screws: Inox A4  
Window: Temp.Glass  
Finish: Painted 160µm  
Gasket: HNBR

Desert/Tropical  
(-40°C)   
Screws: Inox A2  
Window: Temp.Glass  
Finish: Painted 80µm  
Gasket: HNBR

**Colour:**

RAL7030  
STANDARD

RAL7033

RAL7036

RAL7044

RAL7036

RAL7032

RAL7035

RAL7040

RAL9002

ANSI70

**Equipment:**

Standard

With  
Plug & Socket

With windows  
Sun Shields


With 1/4" G  
Oil drain Cock  
Pos.7

With 1/8" G  
Gas Release  
Cock Pos.2

SPECIAL

**Notes:**

.....  
 .....  
 .....  
 .....

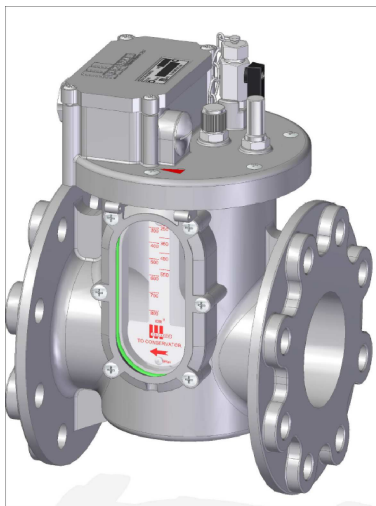

Titolo

Buchholz relay EB  
Order sheet

Data 05/12/17

Scala ===

Dis.

Visto

Dis. Nr

4405

1	2			
---	---	--	--	--